


**WIRING CONFORMS TO JAMMA STANDARD**  
THE WIRE COLORING ON THIS DEVICE CONFORMS TO JAMMA. COMMERCIAL AMUSEMENT EQUIPMENT WIRING COLORS COMPLIES WITH "IDENTIFICATION GUIDELINES"

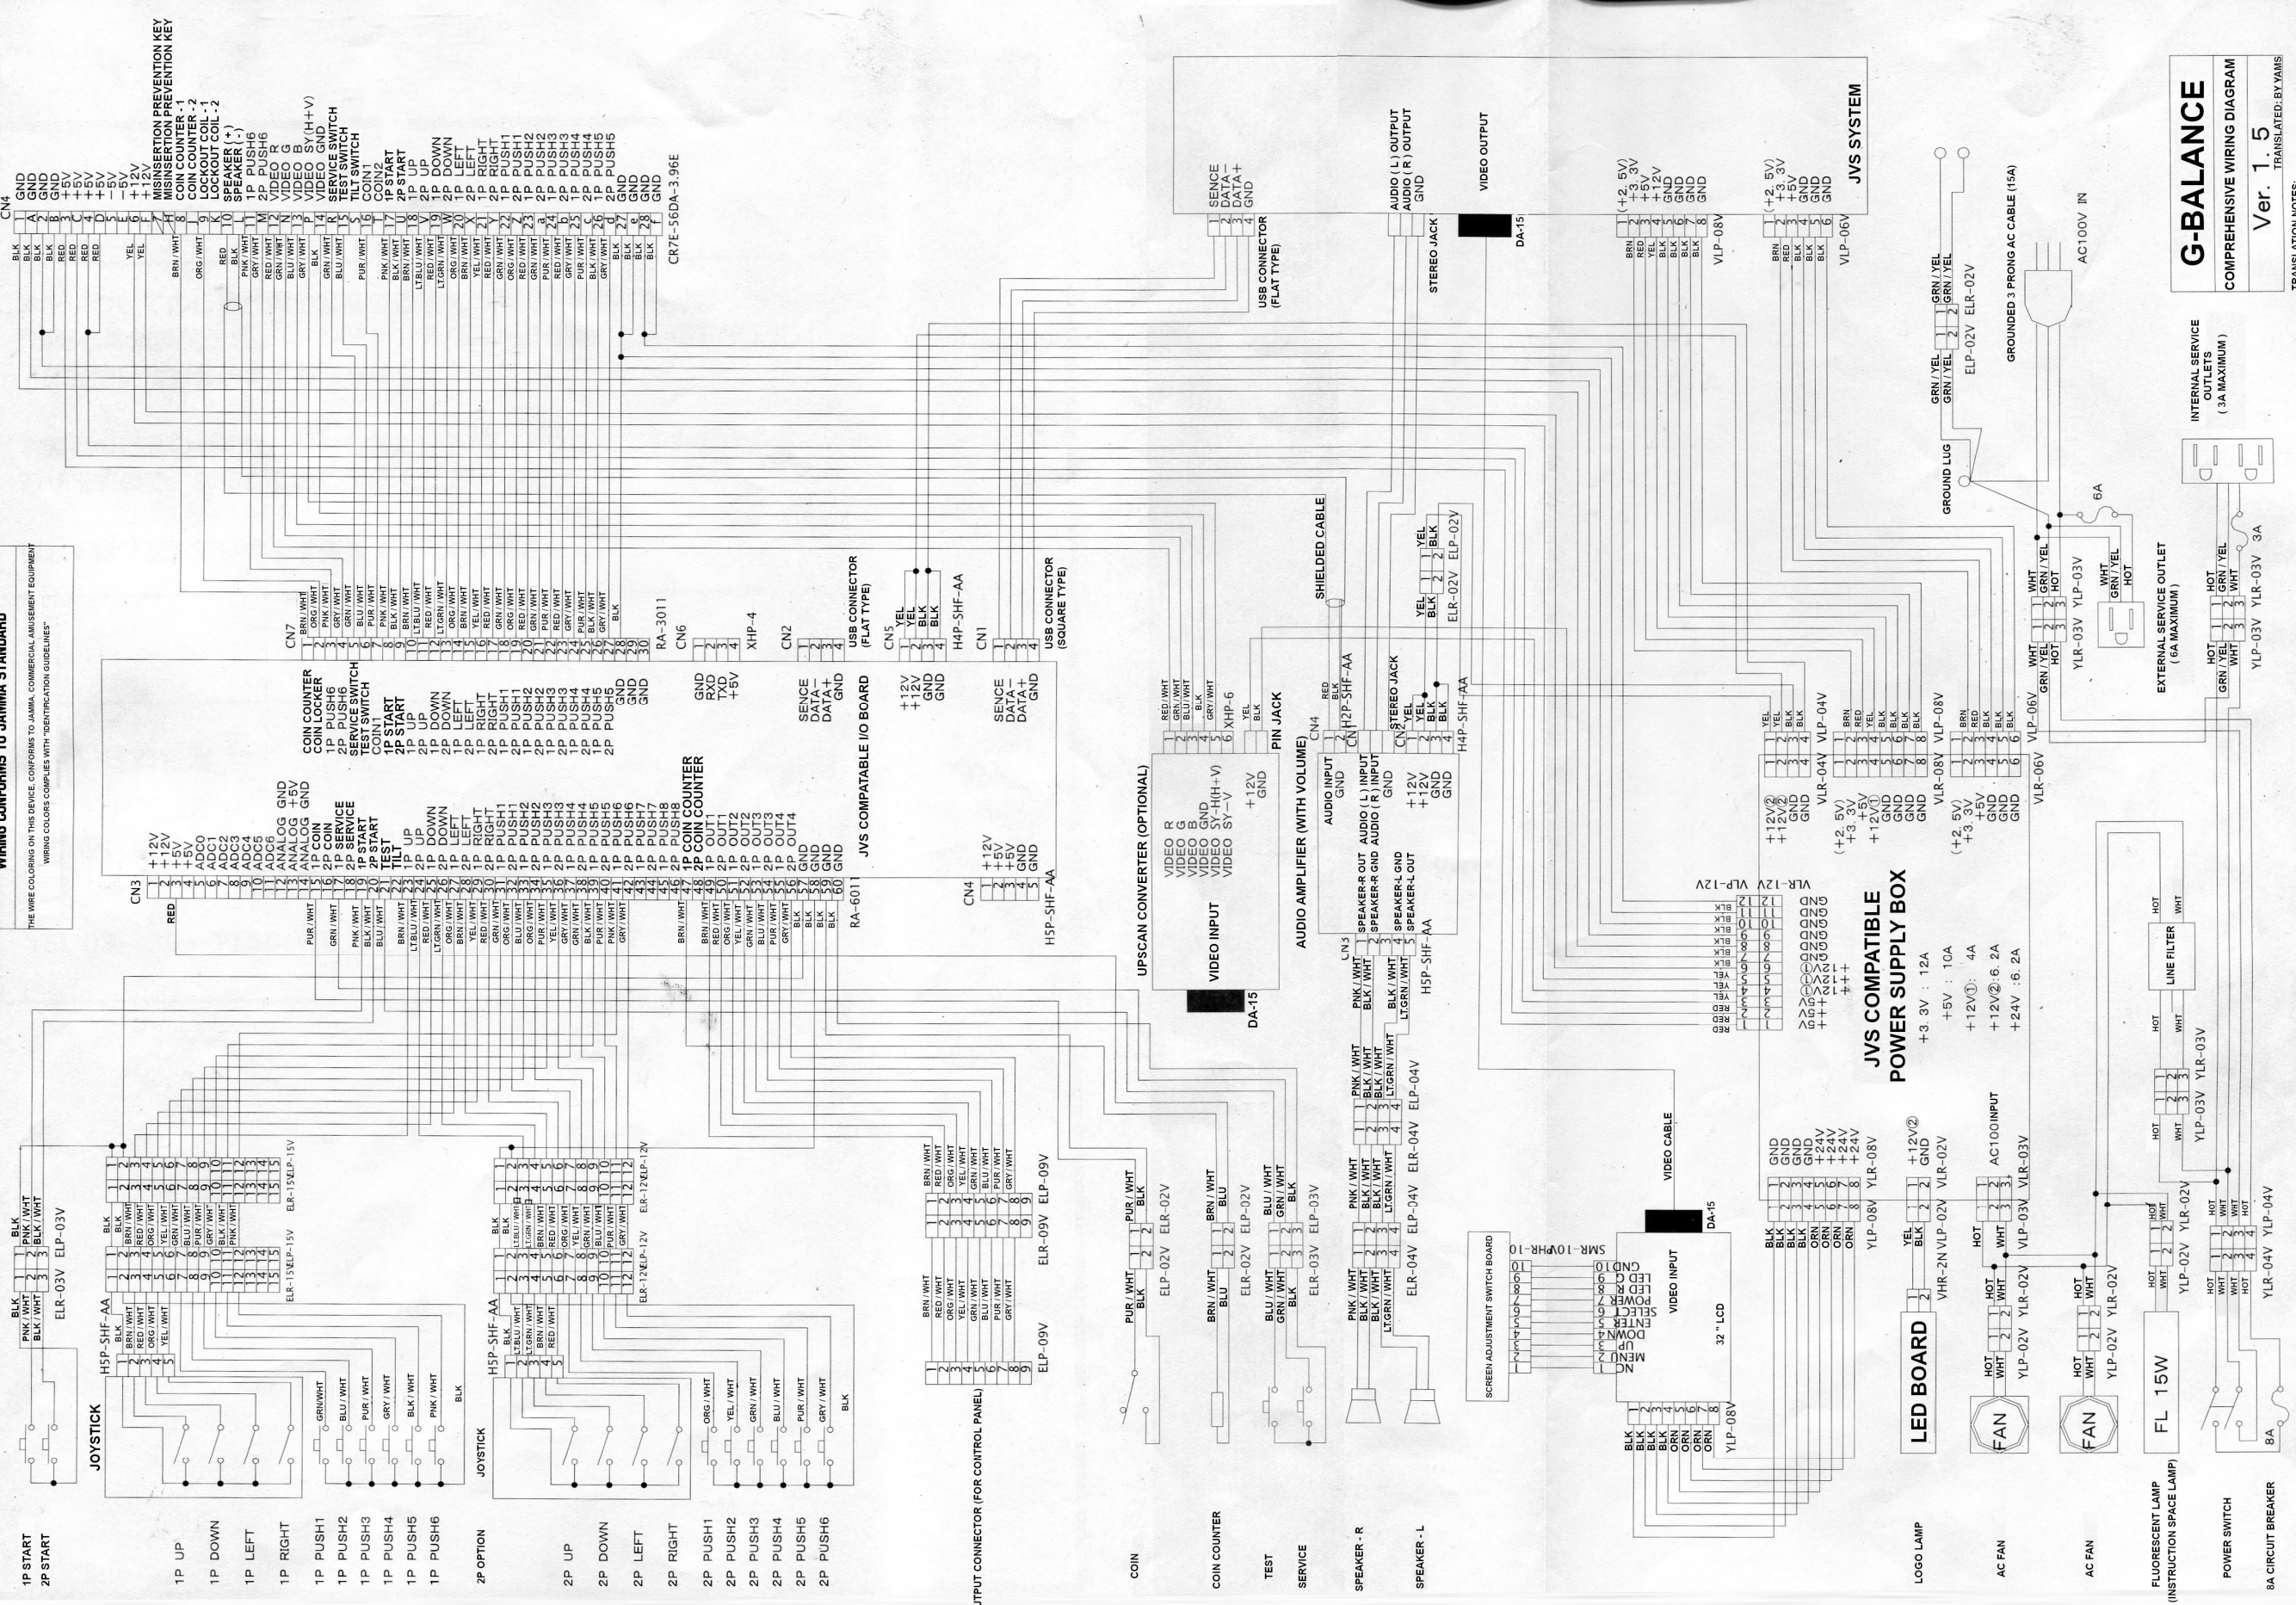

- MISINSERTION PREVENTION KEY**
- COIN COUNTER - 1
  - LOCKOUT COIL - 1
  - SPEAKER (+)
  - 1P PUSH6
  - 2P PUSH6
  - VIDEO G
  - VIDEO SY(H+V)
  - SERVICE SWITCH
  - TEST SWITCH
  - COIN2
  - 1P START
  - 2P UP
  - 2P DOWN
  - 2P LEFT
  - 2P RIGHT
  - 2P PUSH1
  - 2P PUSH2
  - 2P PUSH3
  - 2P PUSH4
  - 2P PUSH5
  - 2P PUSH6
  - GND
  - CR7E-56DA-3.96E

- COIN COUNTER**
- 1P COIN
  - 2P COIN
  - TEST SWITCH
  - 1P START
  - 2P START
  - 1P UP
  - 2P UP
  - 2P DOWN
  - 2P LEFT
  - 2P RIGHT
  - 2P PUSH1
  - 2P PUSH2
  - 2P PUSH3
  - 2P PUSH4
  - 2P PUSH5
  - 2P PUSH6
  - GND
  - RA-3011

- JVS COMPATIBLE I/O BOARD**
- 12V
  - 5V
  - VIDEO R
  - VIDEO G
  - VIDEO B
  - VIDEO SY-H(H+V)
  - VIDEO SY-V
  - XHP-6
  - 12V
  - 5V
  - GND
  - RA-6011

- JVS SYSTEM**
- 1 (+2.5V)
  - 2 (+3.3V)
  - 3 (+5V)
  - 4 GND
  - 5 GND
  - 6 GND
  - VLP-08V
  - VLP-06V

- JVS COMPATIBLE POWER SUPPLY BOX**
- 1 (+3.3V)
  - 2 (+5V)
  - 3 (+12V)
  - 4 (+24V)
  - 5 GND
  - 6 GND
  - 7 GND
  - 8 GND
  - 9 GND
  - 10 GND
  - 11 GND
  - 12 GND

TRANSLATION NOTES:  
HOT = BROWN OR BLACK